

ECO TECH

(Technology For Feet)

ECO SHOE ACCESSORIES

- 鞋子、手袋、皮带生产设备，整厂输出，
品质一流，值得信赖
Full Shoes, handbags, belts production line machines supply,
good quality, you can trust;
- 专业的销售及售后服务队伍，给您提供完备的技术
解决方案，并提供设备维修保养服务
Professional marketing and after-sales service teams
provide you complete and smart technical solutions
and maintenance service;
- 齐全的零配件贮备，给您提供一站式采购服务
Complete parts supply, give you
one-stop shopping service;



ECO TECH

(Technology For Feet)

ECO SHOE ACCESSORIES

OLD LIC BUILDING NEAR JK1ST CROSSING

LAL BANGLOW ,KANPUR 208007 (INDIA)

Ph:+919935542666 / +919559053660 / +919935598670 / +919935598682

Email: zusmani27@gmail.com / zusmani@rediffmail.com / info@ecoshoetech.com

website: www.ecoshoetech.com

Registered Address: 361 D Shakti Nagar, Lucknow -226016 (India)

Professional Machinery Manufacturer
And Supplier!

专业的机械设备制造商与供应商!

Version 2022



About us

关于我们



Eco Shoe Accessories is a professional manufacturer, importer and exporter of shoe and leather goods making machines. We have specialization in Toe Lasting Machines, Seat Lasting, counter Moulding Machine, shoe conveyors and Leather Belts making Machines. We fabricate conveyors as per the dimension and demand of the customer.

With the collaboration of our counterpart M/s DONGGUAN WINCO MACHINERY CO., LTD in china.

We are committed to total customer satisfaction by providing the high quality goods with honesty and at the lowest price and within the stipulated period. Honesty and truth is not only our policy but it reflects through our deeds.

ZU-N737A/B

油壓自動前幫機

Hydraulic Toe Lasting Machine

產品特色 Features

- 选择与功能开关集中控制, 使操作更方便。
- 各机构之压力与速度控制之调整装置均配置于外部, 并附压力表显示, 使操作调整更为方便快捷。
- 新设计之扫刀大座下降终点在外部设定, 不需动工具即可快速调整。
- 中爪子夹紧鞋面后有手动操控放开再夹紧功能。

可选配备:


第一、二爪快拆机构、辅助扫刀机构、辅助压边机构、自动上胶机构。

- The centralized control of selection and function switches make the operation more convenient.
- The adjustment and controlling for the pressure and speed of each mechanism are configured externally, and with gauge display, enabling the operation and adjustment more convenient.
- The new design of wiper heel drafting destination is set, quickly adjusted without any tools.
- The middle pincer has the function that after clamping vamps it can release and re-clamp its manually.

The Optional Mechanism:

Quick-changing mechanism of the first and second pincers, Auxiliary wiper mechanism, Auxiliary side pusher mechanism, automatic cementing mechanism.

型号	Model	ZU-N737A	ZU-N737B
爪數	Pincers	9	7
馬力	Power	2HP	2HP
電熱	Heating Power	1.75KW	1.75KW
使用壓力	Oil Pressure	50kg/cm ²	50kg/cm ²
產量	Productivity	1600pairs/8hrs	1600pairs/8hrs
液壓油用量	Oil Filling	115 liters	115 liters
淨重	N.W	1165kg	1165kg
毛重	G. W.	出貨時提供 Provided before shipment	
機械尺寸	Machine Size	980(L) × 1750 (W) × 1950 (H) mm	
包裝尺寸	Packing Size	1030(L) × 1860 (W) × 2160 (H) mm	

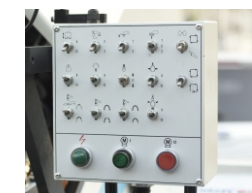

電器箱控制系統
Electrical box control system



內撐台高低位置顯示器
Last supporter high displayer




油壓壓力調整系統
Hydraulic pressure adjustment system



紅外線十字定位
Toe projector positioning system



可選配自動上膠系統
Automatic Cementing Mechanism
Can Be Installed At Request



可選配輔助壓邊、輔助掃刀機構
Auxiliary wiper and side pusher mechanism
can be installed at request



ZU-737MA/MB

油壓自動上膠前幫機


Hydraulic Toe Lasting Machine (with Thermocement)



產品特色 Features

- 各组左右爪子可以设定自动下拉行程或手动操作升降, 让鞋面的张力平衡, 以修正结帮最佳位置。
- 内撑台上升高度, 由机台外部调整。
- 内撑台上升可设定为两段动作, 配合后跟顶座动作, 可防止楦头下滑。
- 鞋头压着机构采用可调二段式压力, 使鞋子于结帮过程中及最后之压着达到最佳效果, 压头的一次压并可视鞋面材料不同, 可选用定呀及定位之两种压着方式, 使结帮更顺畅。
- 扫刀机构前进动作, 可以无段变速调整速度。
- 机台配置自动上胶系统, 极大提高工作效率, 提高产品质量
- Each set of pincers (left and right) can be setting with automatic pulling or manual operated, preventing the upper made of different materials is only pulled on one side.
- The upward stroke of the last support can be adjusted from the knob outside the machine
- There are two step upward movement functions for the last support, preventing the slipped of the last when combined with the movement of the heel support.
- The toe pusher mechanism is designed with adjustable two step pressure. During the movement of the initial pressure, there are two ways (pressure controlled or position controlled) can be set for the best operation
- The forward movement of the wiper can be adjusted as no stepped variable speed controlled.
- Equipped with thermocement mechanism, improve the production efficiency and save the labor cost.

型号	Model	ZU-737MA	ZU-737MB
爪數	Pincers	9	7
馬達動力	Power Mptor	2HP	2HP
電熱	Heating Power	1.75KW	1.75KW
使用壓力	Oil Pressure	50kg/cm ²	50kg/cm ²
產量	Productivity	1600pairs/8hrs	1600pairs/8hrs
液壓油用量	Oil Filling	115 liters	115 liters
淨重	N.W	1185kg	1185kg
毛重	G. W .	出貨時提供 Provided before shipment	
機械尺寸	Machine Size	1750(L) × 980 (W) × 1950 (H) mm	
包裝尺寸	Packing Size	1860(L) × 1030 (W) × 2160 (H) mm	

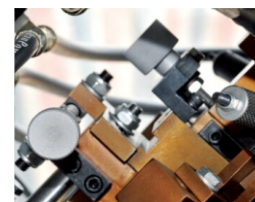


中爪調整機構
The middle pincer adjustment structure



紅外線十字定位
Loe projector positioning



內撐台高低位置顯示器
Last supporter hight displayer

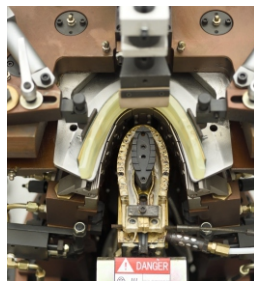

胶盘、扫刀、束紧器、一二爪根据
客户楦头订制
Injector, wiper, toe band, first and second
pincers making according customers
shoelasts.



臺灣東峰電磁閥
Taiwan DOFLUID solenoid valve

ZU-737 A/B

油壓自動前幫機


Hydraulic Toe Lasting Machine




產品特色 Features

- 各组左右爪子可以设定自动下拉行程或手动操作升降, 让鞋面的张力平衡, 以修正结帮最佳位置。
- 内撑台上升高度, 由机台外部调整。
- 内撑台上升可设定为两段动作, 配合后跟顶座动作, 可防止楦头下滑。
- 鞋头压着机构采用可调二段式压力, 使鞋子于结帮过程中及最后之压着达到最佳效果, 压头的一次压并可视鞋面材料不同, 可选用定呀及定位之两种压着方式, 使结帮更顺畅。
- 扫刀机构前进动作, 可以无段变速调整速度。
- Each set of pincers (left and right) can be setting with automatic pulling or manual operated, preventing the upper made of different materials is only pulled on one side.
- The upward stroke of the last support can be adjusted from the knob outside the machine
- There are two step upward movement functions for the last support, preventing the slipped of the last when combined with the movement of the heel support.
- The toe pusher mechanism is designed with adjustable two step pressure. During the movement of the initial pressure, there are two ways (pressure controlled or position controlled) can be set for the best operation
- The forward movement of the wiper can be adjusted as no stepped variable speed controlled.

型号	Model	ZU-737A	ZU-737B
爪數	Pincers	9	7
馬達動力	Power Mptor	2HP	2HP
電熱	Heating Power	1.75KW	1.75KW
使用壓力	Oil Pressure	50kg/cm ²	50kg/cm ²
產量	Productivity	1600pairs/8hrs	1600pairs/8hrs
液壓油用量	Oil Filling	115 liters	115 liters
淨重	N.W	1165kg	1165kg
毛重	G. W .	出貨時提供 Provided before shipment	
機械尺寸	Machine Size	1750(L) × 980 (W) × 1950 (H) mm	
包裝尺寸	Packing Size	1860(L) × 1030 (W) × 2160 (H) mm	

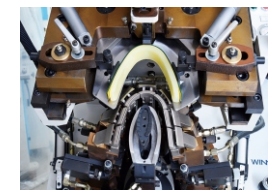


控台、爪子機械
Last supporter and pincers mechanism

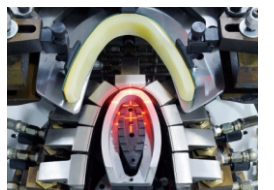

紅外線十字定位
Loe projector positioning



內撐台高低位置顯示器
Last supporter hight displayer

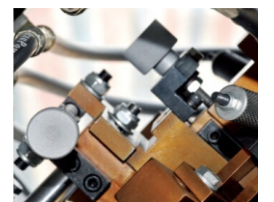

中爪調整機構
The middle pincer adjustment structure



可調觸控杆部位
Adjustable touch rod parts



臺灣東峰電磁閥
Taiwan DOFLUID solenoid valve



ZU-639A/MA


中後幫機
Hydraulic Heel&side Lasting Machine



產品特色 Features

- 内外腰智能化轨迹布胶：简单方便的内外腰布胶轨迹，免除复杂的布胶轨迹设定。
- 主动式胶嘴停胶机构：出胶及停胶动作反应快速准确，漏胶机会大幅度降低。
- 独立式爪子寸动上拉：可个别设定左右爪子手动及自动上拉量，鞋面紧度达到自然分配。
- 中帮及后帮重叠结帮：中帮与后帮结帮衔接平顺，动作一气呵成。
- 贴植型爪子内拉功能：爪子拉紧鞋面后再向内拉紧，使内腰鞋面更加贴紧植头。
- 电动式爪子位置调整：轻触开关，爪子即可电动移到最佳扶持位置合适的拉力。
- 触控式屏幕人机界面：整合于屏幕的人性化操控装置，操作维护方便。
- 弹性束紧器上下运动：自动平衡与扫刀间距，后帮结帮效果平整扎实。
- 计算机动作电路控制：PLC动作变化灵活多样且控制精确，故障检修容易。
- 电动束紧器前后调整：束紧器位置采用电动调整，使用方便。
- 操作参数记忆存档：最多可记忆三十组计时器及动作参数，方便更换鞋型。
- 分离式中帮指头机构：配合独特油路设计，内腰贴植密扎实，效果完美。
- 智能型自动侦错功能：对可能故障点及时提供警示，检修方便快捷。
- 马达传送式送胶机构：送胶流量及长度控制均匀准确，卡胶机率低。
- 红外线控制上胶功能：上胶总长度可调整红外线距离控制上胶行程。
- Inner and outer waist intelligent cementing: easy and flexible control on cementing path without any complicated adjusted.
- Active cement-stopping device: with quick and accurate response of cement-stopping device, lower probability of leakage.
- Independent pincer pulling: separately adjustable pulling for left and right pincer by manual or automatic operation, providing natural tension distribution against to the upper.
- Overlapped seat and side lasting: smooth the connection between seat and side lasting, makes a fast and excellent cementing result.
- Pincer inward pulling: extra inward pulling after pincers grasping the upper, which presses upper against to shoe last tighter.
- Dynamoelectric pincer position adjustment: slight touch on the switch, pincers can be moved to the best pulling position by proper pull force.
- Touchscreen interface: humanized controlling device which makes easy operation and maintenance.
- Auto-balanced forming band moves up and down: auto-balance gap between wipers, make a perfect seat lasting result.
- Computerized control: plc control device enables machine to have maximum flexibility.
- Operation parameters storage: saving up to 30 timer and operation parameters, timing for different shoe.
- Separate lasting block mechanism: combined with unique hydraulic system, makes inner waist against to lasting tighter and firmer with a perfect effect.
- Intelligent automatic fault warning: warnings for various incipient faults, easy operation and maintenance.
- Motor-driving cementing mechanism: stable and adjustable quantity and length of cementing with excellent cementing quality.

馬達動力	Power Mptor	2HP
產量	Productivity	1500~1800pairs/8hour
淨重	N.W	1100kg
機械尺寸	Machine Size	1700(L) x 1000 (W) x 1950 (H) mm
包裝尺寸	Packing Size	1800(L) x 1160 (W) x 2100 (H) mm

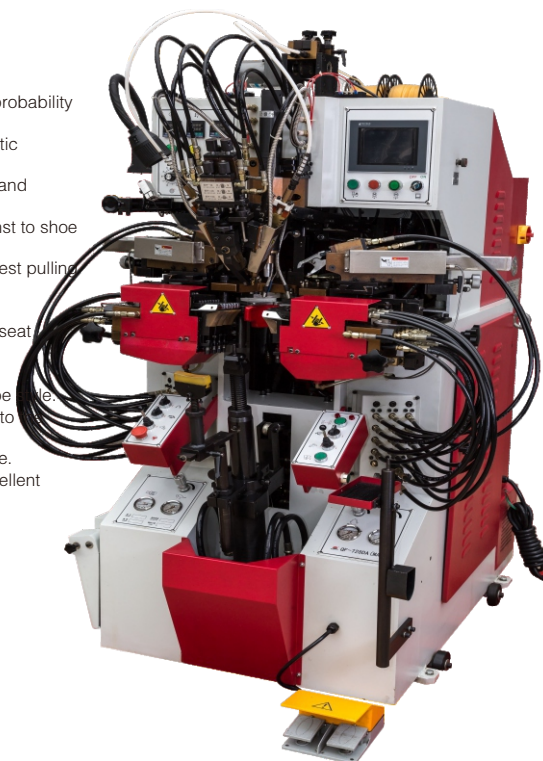

ZU-727A

油壓自動後幫機
Hydraulic heel seatlasting Machine




產品特色 Features

- 本機具有結幫高度微調之裝置，鞋楦高度調整，定位準確。
- 掃刀及束緊器規格齊全，可適用於任何鞋型；束緊器採用鏈條式包覆，束緊效果最佳。
- 本機採用齒輪、齒條及棘輪式設計，調整輔助撐台高度，快速確實。
- 楦頭撐台第二次上升壓著設計配合掃刀加熱裝置，增進結幫效果使成品平坦不發角，提高鞋子品質
- This machine is equipped with the device of lasting height micro switch, which makes the machine easily adjusted and positioned accurately.
- We have full sizes of wipers and forming bands, which fit any shapes of shoes. The forming bands are wrapped by chain and can accordingly produce a good forming effect.
- This machine adopts gears, gear racks and ratchets to quickly and precisely adjust the auxiliary supporter.
- The second time and pressing of the last supporter works with the wiper heating device to increase the lasting effect. It smoothes the lasting areas and upgrade the quality of the shoes.

馬力	Power	2HP
電熱	Heating Power	0.8KW
使用壓力	Oil Pressure	40kg/cm ²
產量	Productivity	3000 pairs/8hour
淨重	N. W.	430kg
毛重	G. W.	出貨時提供 Provided before shipment
液壓油用量	Oil Filling	50 liters
機械尺寸	Dimention	750(L) x 970 (W) x 1450 (H) mm
包裝尺寸	Machine Size	780(L) x 1250 (W) x 1700 (H) mm



臺灣東峰電磁閥
Taiwan DOFLUID solenoid valve



日本和泉繼電器
Japan IDEC relay




ZU-710A

強力牆式壓底機

Heavy-duty Walled Sole Attaching Machine

產品特色 Features

- 本機採用全油壓系統設計，出力大、貼合牢固，除節省人工外，壓著均勻、效果佳。
- 上升油壓缸使用預充潤滑油量，可使操作上升動作加速，節省操作時間。前後束緊機構後退時，可控制其後退距離，更換鞋子大小簡易。
- 本機每個動作均具有調壓功能，調壓把手位於機台前方，以利操作人員調整。
- 兩支壓杆高低調整採用油壓自動平衡結構，對於鞋楦之高低變化，長統或半長統鞋均免調整，並確保兩支壓杆之壓力平均，使鞋底之壓著力量更均勻。兩支壓杆可同時做偏擺動作，以利鞋楦之取放，一改舊式機台壓杆為固定式，操作不便之問題。
- 本機適用於鞋子尺寸(含壓底模)--長度130~400mm之間，寬度150mm以下，高度200mm以下，鞋邊高度80-65mm以下之牆式包底、龍船底運動鞋與休閒鞋的外底壓著。
- There is a prepared oil-tank to supplement oil when cylinder rising which makes the rising faster and saves the operation time to increase benefit.
- When the mechanism of front-rear pressing reduces, a special circuit device is adopted to control the receding stroke, and the proper receding distance is accordingly for locating different sizes of shoes.
- Independent pressure adjustment. Adjustment handle in the front of machine.
- Pressure level adopts special design of bias swing, high-and-low adjustment and self-poise of oil linking, which makes shoes convenient in fetching, smooth on surface, free from damage and high in efficiency and good in quality. And it's convenient to put and take out of the last as well.
- This machine is available to press shoes with lasts between 130mm and 400mm in length which including the press mold, below 150mm in width, below 200mm in height and walled outsoles below 80-65mm in height, such as jogging shoes, walled sports shoes and casual shoes.

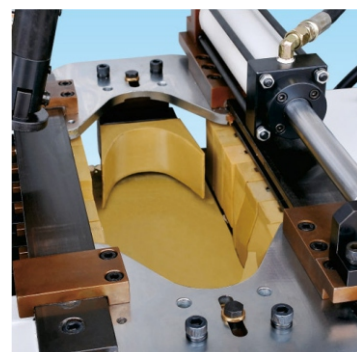

型号	Model	ZU-710A
侧压块数量	Pcs of lateral Latexes	8
侧压块高度	Height of Lateral Latexes	80mm
前后束紧时间距调整	Adjustment of Constriction	2sections
馬達動力	Power	2.2KW
使用壓力	Oil Pressure	50 kg/cm ²
產量	Productivity	250 pairs/hour
淨重	N. W.	1140kg
毛重	G. W.	出貨時提供 Provided before shipment
機械尺寸	Dimension	1090 x 1000 x 1960mm
包裝尺寸	Machine Size	1150 x 1220 x 2030mm



ZU-818 強力牆式壓底機

Heavy-duty walled sole attaching machine

產品特色 Features

- 本機採用全油壓設計，壓力大，貼合牢固。
- 壓底，壓邊及前後束緊，可一次完成，亦可個別完成，故平底，包邊及特殊包邊設計皆可適用，一機三用，經濟效益高。
- 使用特殊設計多支密排式油壓缸，能配合鞋邊不規則之輪廓，而產生壓邊均衡且沒有死角優良效果。
- 壓杆相通之設計，使鞋底于壓底時，受力均勻，不產生空隙；且壓杆自動橫移定位設計，使鞋子之取放方便無阻礙，能提高產能。
- Fully hydraulic design assures enough pressure and a firm joint.
- Sole-pressing, side-pressing and toe & heel forming can be processed synchronously or separately. The machine is applicable for flat base, serging and special serging design shoes. It creates high efficiency.
- The multiple oil cylinders design is perfect for irregular shoe side and produces an even side-press effect free of dead angle.
- Pressure-connection of two pressing-bars makes pressure even to the outsole and without void. Also, with automatic pressing-bar locating system, shoes can be in/out easily.

機械尺寸	Machine Size	1200 × 1150 × 1930 mm
包裝尺寸	Packing Size	1300 × 1300 × 2100 mm
每日產量	Daily Capacity	2000 Pairs/8 hr
淨重	N. W.	1300KGS
毛重	G. W.	1350KGS
馬力	H.P	3HP

ZU-819 萬用式壓底機

Hydraulic Universal Sole Attaching Machine

產品特色 Features

- 本機採用全油壓設計、壓力大、貼合牢固。
- 鞋前幫的級別可自動調節。
- 女鞋可貼合任意高度的鞋跟。
- 男鞋可貼合任意尺寸。
- 以特殊鞋頭絞鏈式前壓座及鞋跟腹牆刀，機械式控制使男女鞋皆適用。
- Adopting hydraulic design, the machine has enough high pressure to make a firm and solid adhesion.
- The grade of shoes toe can be adjusted automatically.
- This machine can attach high heel lady shoes at any height.
- This machine can attach man shoes in any size.
- With special chain toe pressing seat and heeled walled cutter, the mechanical control suitable for men shoes and lady shoes.

機械尺寸	Machine Size	850 × 1070 × 1920 mm
每日產量	Daily Capacity	2500 Pairs/8hrs
淨重	N. W.	700KGS
毛重	G. W.	750KGS
馬力	H.P	2HP/4HP



YK-820A



YK-820B

ZU-820A/B

平板壓底機

Hydraulic Sole Attaching Machine

機械尺寸	Machine Size	850 × 650 × 1755 mm
每日產量	Daily Capacity	2000 Pairs/8 hr
淨重	N. W.	500KGS
毛重	G. W.	550KGS
馬力	H.P	2HP/4HP



ZU-821 气囊式壓底機

Air-Bag Sole Attaching Machine

機械尺寸	Machine Size	750 × 400 × 1050 mm
淨重	N. W.	150/165KG
電壓	Weight	220V/50HZ
壓合時間	Compressing Time	2-99S
產量	Daily Capacity	150 Pairs/hr
氣壓	Air pressure	0.2-0.7Mpa



ZU-822 气动袋壓底機

Air-Bag Sole Attaching Machine

機械尺寸	Machine Size	790 × 460 × 850 mm
淨重	N. W.	120/135KG
電壓	Weight	220V/50HZ
壓合時間	Compressing Time	2-99S
產量	Daily Capacity	200 Pairs/hr
氣壓	Air pressure	0.2-0.7Mpa




ZU-660A 外翻鞋後踵定型機

Backpart Moulding Machine (For Stitching Down Shoes)

產品特色 Features

- 後跟鞋面外緣可同時內折定型和一般後跟定型。
- 適用各種材質之港寬定型。
- 配有掃刀，鞋面可調整等各種功能。
- 可傾斜式檯頭更方便操作。
- 內外模溫度可依材質自行調節。
- 內外模依客戶檯頭定制，可獲得更完美的外型效果。
- 投影燈可獲得最準確定型位置。
- 調整式夾具使鞋面與檯頭100%貼合。
- 採用環保式冷凍系統，製冷速度快，冷凍溫度可達零下30°C。
- 定型後使內襯、膠片、鞋面緊密貼合，不起皺、不變形、不起泡。
- 微電子處理系統。
- 檯頭往上衝壓動作模式。

機械尺寸	Machine Size	880 × 1480 × 1900 mm
淨重	N. W.	640KG
電壓	Weight	220V/50HZ
功率	Power	2.7KW
產量	Daily Capacity	1200-1800 Pairs/8H
氣源	Air pressure	6Bar

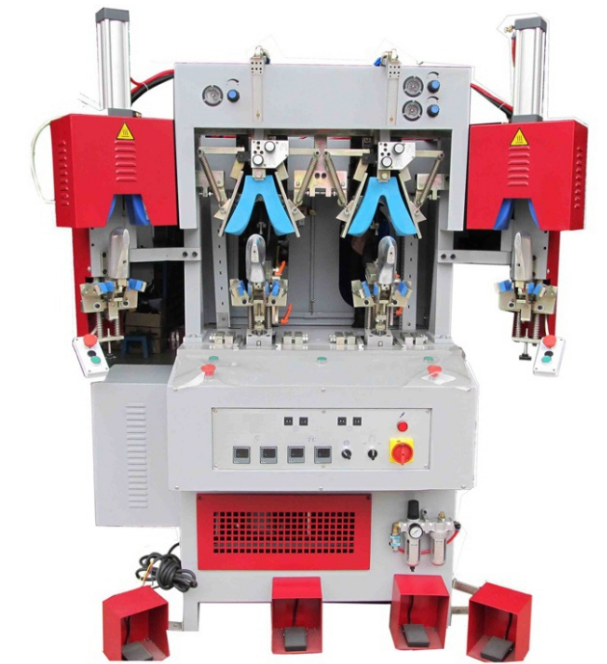

ZU-660B 後踵定型機 (兩冷兩熱)

Backpart Moulding Machine (2 Cold + 2 Hot)

- The outside edge of heel and vamp can be made with inward fold moulding and normal heel moulding.
- It is suitable for moulding of toe puffs made of different materials.
- It has models with wiper and adjustable vamp function.
- The last can be tilted for easier operation.
- The temperature of inner and outer moulds can be regulated automatically according to different materials.
- The inner and outer moulds are made based on the lasts of customers, which will lead to perfect performance.
- The projector can provide a more accurate moulding position.
- The adjustable clamp will achieve 100% jointing of vamp with last.
- The adoption of environment-friendly freezing system features high speed and good result with freezing temperature up to -30°C.
- After moulding, the liner, rubber sheet and vamp are closely jointed without crinkling, deformation and bubbling.
- Micro-electronic processing system.
- Last upward action mode.

機械尺寸	Machine Size	850 × 1560 × 2000 mm
淨重	N. W.	571KG
電壓	Weight	220V/50HZ
功率	Power	2.7KW
產量	Daily Capacity	1200-1800 Pairs/8H
氣源	Air pressure	6Bar



ZU-661A 鞋頭定型機 (兩冷兩熱)

Toe Moulding Machine (2 Cold + 2 Hot)

產品特色 Features

- 一般鞋頭預定型或外翻鞋定型。
- 適用各種材質之港寶定型。
- 熱模上、下可同時加溫軟化鞋面，使鞋面更貼合。
- 冷模夾具使用鐵弗龍束組配合植頭模，可依鞋面厚度任意調整，定型效果完美。
- 植頭用鐵弗龍束組依客戶植頭製作，準確度高。
- 本機熱模設有蒸汽系統，使鞋面加溫過程更具彈性與光澤。
- 採用環保式冷凍系統，製冷速度快，冷凍溫度可達零下30°C。
- 定型後使內、膠片，鞋面緊密貼合，不起皺、不變形、不起泡。
- 膠模往下壓動作模式。

機械尺寸	Machine Size	870×900×1500 mm
淨重	N. W.	370KG
電壓	Weight	220V
功率	Power	3.5KW
產量	Daily Capacity	1000-1200Pairs/8H
氣源	Air pressure	6Bar

ZU-661B 鞋頭定型機 (PLC)

Toe Moulding Machine (PLC)

- Suitable for normal and stitch-down upper pre-moulding.
- It is suitable for moulding of toe puffs made of different materials.
- For hot moulding, upper and lower moulds can be heated simultaneously to soften vamp for better jointing.
- For cold mould clamp, Teflon band and toe mould are combined to use, which can be freely adjusted according to the vamp thickness and can achieve perfect moulding performance.
- The toe last is made of Teflon band based on that offered by customers with a high precision.
- The hot mould of the machine contains steam system which will make the vamp more flexible and lustrous.
- The adoption of environment-friendly freezing system features high speed and good result with freezing temperature up to -30°C.
- After moulding, the liner, rubber sheet and vamp are.
- Closely jointed without cranking, deformation and bubbling.

機械尺寸	Machine Size	800×850×1500 mm
淨重	N. W.	370KG
電壓	Weight	220V
功率	Power	3.5KW
產量	Daily Capacity	1000-1200Pairs/8H
氣源	Air pressure	6-7Bar



YK-700A



YK-700B

ZU-700 急速冷凍定型機

Chiller

產品特色 Features

- 本機採用義大利高效能可調式輸送帶控制系統。
- 強勁的冷凍系統，高轉速風量循環系統，數十秒風達到-20攝氏度。
- 設計新穎的雙動閘門、自動除霜、快速冷凍定型，加速膠水聚合時間。
- 節電、節省空間、節省撞頭，適合任何鞋履。
- Adopt Italian adjustable high efficient conveyor control system.
- Strong freezing system, high-speed wind circulation system, to reach -20 degree in short time.
- New design double-action strobe, automatic defrost, quick freezing moulding accelerate glue polymerization time.
- Save power, room, shoes last, and fit for all kinds of shoes.

機械尺寸	Machine Size	250/300/350×900×1580 mm
電壓	Weight	380V
功率	Power	6KW
產量	Daily Capacity	800-1200 Pairs/8H

ZU-701 蒸汽熱定型機

Heat Setter

產品特色 Features

- 本機用於鞋幫結束後，利用高溫蒸汽及乾燥之熱氣高效率軟化定型幫面以達到快速成型效果。該機的運用可節約電能，植頭。
- 特製不銹鋼熱室，利用熱風和蒸氣高速對流以消除幫面內應力，使幫面更貼植。徹底改變了傳統定型用加熱部件直接對幫面進行不科學烘烤的工藝，從而避免了幫面因烘烤而損壞原有柔韌性與光澤度的弊端。
- 配有可調式溫度控制器，可依鞋材調至最佳使用溫度。
- 用計時器調節，控制速度。
- This machine uses steam and high temperature drying wind to efficiently soften the upper to achieve perfect performance, it can also help save power.
- Special stainless steel cabinet uses hot wind and steam to make the upper soft and more stick to the shoe last.
- With adjustable temperature controller, temperature can be adjusted according to shoe material.
- With timer and speed controller.



YK-701A



YK-701B

機械尺寸	Machine Size	250/300/350×900×1580 mm
電壓	Weight	380V
功率	Power	14KW
產量	Daily Capacity	800-1200 Pairs/8H



ZU-702 雙層紅外流水線

Double Layers NIR Production conveyor

產品特色 Features

- 本機採用上下兩層，上層放大底，下層放鞋面。
- 烤箱可根據材質不同來獨立控制並設定溫度，提高加熱速度，大大節省空間與電能。
- 採用近紅外線燈管，能對膠水層內外部均勻加熱，並配合熱風循環系統，可快速穩定烘乾並活化膠水。
- 烤箱及刷膠部位均設有吸氣排氣系統，可將烤箱內的廢氣有效的排出，確保員工身心健康。
- 採用SCR變頻器控制系統，可精確控制溫度和紅外線的亮度。
- 貼底設有保溫箱，可使鞋子表面的膠分子保持更好的活性，使貼底效果更佳。

- With double layers, the up layer for outsoles and down layer for uppers.
- The ovens can be separately controlled and set the temperature according to the material, improve the heating speed, save space and energy.
- With NIR lights, this machine can thoroughly heat the glue, and with wind blowing system, can dry and activate the glue fast and perfectly.
- There are exhaust systems in oven and place for brushing glue, so it can exhaust the polluted air, so that to keep air clean and healthy for workers.
- With SCR control system, can control the temperature and the NIR lights accurately.
- There is heat keeping case for outsoles, so that can keep the activeness of the glue and make the sole attaching performance more perfect.

機械尺寸	Machine Size	14000 × 1400 × 1350 mm (can be customize)
烤箱尺寸	Oven size	can be customized
產量	Production Capacity	800-2000 Pairs/ 8hrs
功率	Power	38KW



ZU-703 乾燥活化機

Cement Drying And Activating Machine

尺寸	Machine Size	2200 / 2850x650x1600mm
重量	Weight	450/550kg
電壓	Voltage	380V/50HZ
功率	Power	5KW/7KW
產量	Daily Capacity	700 pairs / 8H /1200 Pairs /8H

ZU-704 立體迴圈生產線

Vertical & Rotary Production Conveyor





ZU-705A/B 普通流水線

Belt And Rod Type Conveyor



ZU-706A/B 紅外線烤箱

NIR Oven

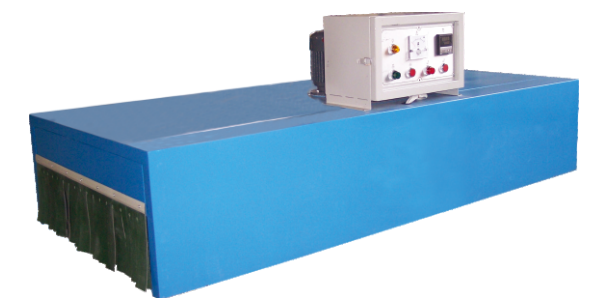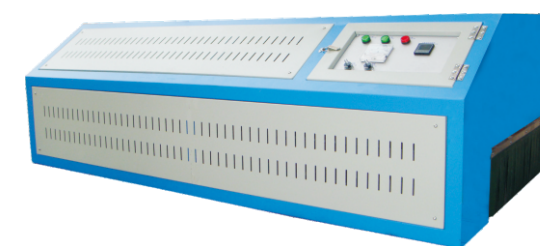



ZU-566 油壓釘根機
Hydraulic Heel Nailing Machine

機械尺寸	Machine Size	700 × 530 × 2000 mm
淨重	N. W.	500KG
電壓	Weight	380V/50Hz
功率	Power	2HP
產量	Daily Capacity	2000Pairs/8H



ZU-567 半自動釘根機
Semi-automatic Heel Nailing Machine

機械尺寸	Machine Size	900 × 900 × 2180 mm
淨重	N. W.	400KG
電壓	Weight	220V/50Hz
功率	Power	0.2KW
產量	Daily Capacity	1300Pairs/8H
氣源	Air pressure	6Bar



ZU-663 全自動鞋頭整平機
Automatic Toe Flattening Machine

機械尺寸	Machine Size	L750 × W800 × H1980 mm
淨重	N. W.	300KG
電壓	Weight	380V
功率	Power	0.7KW
產量	Daily Capacity	2000 Pairs/8H



ZU-664A 鞋口定型機 (四工位)
Top Line Forming Machine (4 Stations)

尺寸	Machine Size	L700 × W620 × H1250mm
重量	Weight	185KG
電壓	Voltage	220V
功率	Power	0.7KW
產量	Capacity	1400Pairs/8H



ZU-568 全自動釘根機
Automatic Heel Nailing Machine

機械尺寸	Machine Size	900 × 900 × 2180 mm
淨重	N. W.	420KG
電壓	Weight	220V/50Hz
功率	Power	0.2KW
產量	Daily Capacity	2000Pairs/8H
氣源	Air pressure	6Bar



ZU-662 全自動後踵整平機
Automatic Heel Crowning Machine

機械尺寸	Machine Size	700 × 900 × 1600 mm
淨重	N. W.	400KG
電壓	Weight	380V
功率	Power	0.37KW
產量	Daily Capacity	2000 Pairs/8H



ZU-664B 鞋口定型機
Top Line Forming Machine

尺寸	Machine Size	L550 × w1000 × H1700mm
重量	Weight	280KG
電壓	Voltage	220V
功率	Power	1KW
產量	Capacity	1800Pairs/8H
氣源	Air pressure	6bar



ZU-664C 鞋口定型機
Top line Forming Machine

尺寸	Machine Size	L1420 × W840 × H1380mm
重量	Weight	220KG
電壓	Voltage	220V/50HZ
功率	Power	1.3KW
產量	Capacity	1600Pairs/8H



ZU-665 马靴靴面定型機
Vamp Crimping Machine

尺寸	Machine Size	1030 × 850 × 1660mm
淨重	N. W.	300KG
毛重	G. W.	330KG
功率	Power	1.8KW
電壓	Voltage	380V/50Hz
產量	Capacity	2000Pairs/8H



ZU-666 自動靴筒定型機
Boots ironing machine

尺寸	Machine Size	L770 × w1020 × H2000mm
重量	Weight	280KG
電壓	Voltage	380V
功率	Power	4.5KW
產量	Capacity	1500Pairs/8H



ZU-669A 幫角擗平按摩機
Pounding Machine

尺寸	Machine Size	L800 × W750 × H1300mm
重量	Weight	150KG
電壓	Voltage	380V
功率	Power	9KW



ZU-669B 幫角擗平按摩機(帶沙輪)
Pounding machine(with grinding wheel)

尺寸	Machine Size	L960 × W750 × H1500mm
重量	Weight	100KG
電壓	Voltage	380V/50HZ
功率	Power	1.1KW



ZU-667 包子鞋整型按摩機
Rotary Pre-forming Machine

尺寸	Machine Size	L900 × w1270 × H1800mm
重量	Weight	245KG
電壓	Voltage	380V
功率	Power	5KW
產量	Capacity	1200Pairs/8H



ZU-668 鞋口錘平機
Hammering Machine

尺寸	Machine Size	L550 × W700 × H1300mm
重量	Weight	90KG
電壓	Voltage	380V
功率	Power	0.4KW



ZU-670A 鞋頭蒸濕軟化機
Toe Upper Steaming Machine

尺寸	Machine Size	L660 × w620 × H1290mm
重量	Weight	130KG
電壓	Voltage	220V
功率	Power	4.5KW
產量	Capacity	2200Pairs/8H



ZU-670B 鞋面蒸濕軟化機
Humidifier For Upper

尺寸	Machine Size	780 × 1220 × 1430mm
重量	Weight	165KG
電壓	Voltage	380V
功率	Power	12KW



ZU-671 後套活化機
Heel seat activating machine

尺寸	Machine Size	L480 × W700 × H1300mm
重量	Weight	180KG
電壓	Voltage	380V
功率	Power	4.5KW
產量	Capacity	1500Pairs/8H



ZU-672 小型活化機
Glue Re-activator

尺寸	Machine Size	L680 × W595 × H1235mm
重量	Weight	87KG
電壓	Voltage	380V/50HZ
功率	Power	4KW



ZU-674 熱風除皺機
Thermo Ironing Machine

尺寸	Machine Size	L550 × W750 × H1650mm
重量	Weight	80KG
電壓	Voltage	380V
功率	Power	3KW
產量	Capacity	1200Pairs/8H



ZU-676 熱熔膠沿邊上膠機
Edge Hot Melt Adhesive Coating Machine

尺寸	Machine Size	L470 × W380 × H560mm
重量	Weight	26/31KG
電壓	Voltage	220V/50HZ
功率	Power	1/8HP
电热	Electric Heating	900W
气压	Air Pressure	4 KG



ZU-673A 鞋面压翘 (单缸)
Upper pre-forming machine(One station)

尺寸	Machine Size	L750 × w500 × H1550mm
重量	Weight	200KG
電壓	Voltage	220V
功率	Power	1.2KW
產量	Capacity	640Pairs/8H
氣壓	Air pressure	6bar



ZU-673B 鞋面压翘 (双缸)
Upper pre-forming machine(Two station)

尺寸	Machine Size	L800 × w900 × H1550mm
重量	Weight	335KG
電壓	Voltage	220V
功率	Power	2.35KW
產量	Capacity	1280Pairs/8H
氣壓	Air pressure	6bar



ZU-677 熱熔膠上糊機
Hot Melt Adhesive Coating Machine

尺寸	Machine Size	660 × 470 × 680mm
重量	Weight	68/88KGS
電壓	Voltage	220V/50HZ
电热	Electric Heating	1750W
上胶范围	Workable Coating Range	18cm/ 30cm / 50cm



ZU-678 熱熔膠塗布機
Hot Melt Adhesive Spraying Machine

尺寸	Machine Size	870 / 970 × 460 × 1180mm
重量	Weight	59/77KGS,66/84KGS
電壓	Voltage	220V/50HZ
电热	Electric Heating	1100W
氣壓	Air pressure	4KGS



ZU-679 中底固定机

Insole Fixing Machine


尺寸	Machine Size	L570×W390×H1560mm
重量	Weight	55KG
氣壓	Power	0.5Mpa
產量	Capacity	3000Pairs/8H



ZU-680 自動上膠折邊機

Edge Folding and Cementing Machine

尺寸	Machine Size	L1210×W550×H1160mm
重量	Weight	135KG
氣壓	Power	0.25KW

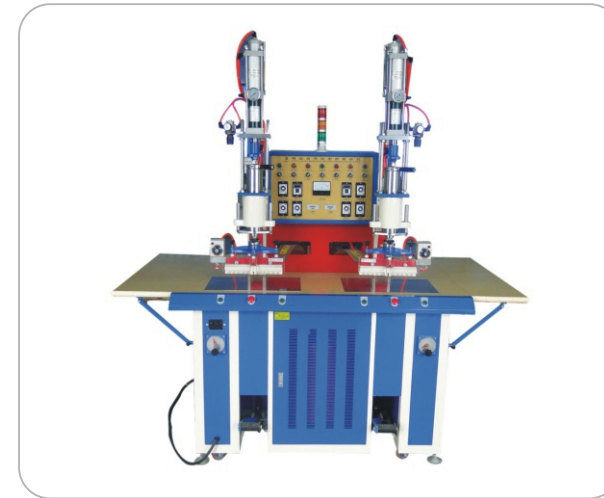

ZU-682 双头高周波

Double-head High Frequency Machine

高周出力	H.F Output	8/15KW
最大壓力	Max Pressure	600/800KG
震盪周率	Oscillation Frequency	2.712MHZ
電源電壓	Power Supply	AC 220/380/400/415/440V
電源輸入	Input power	15/25KVA
活動範圍	Work Area	50mm/60mm



ZU-683 自動滑台熔斷高周波

High-Frequency Cutting Machine (Skid Platform)

高周出力	H.F Output	8/15KW
最大壓力	Max Pressure	15T/25T
震盪周率	Oscillation Frequency	27.12MHZ
電源電壓	Power Supply	AC 220/380/400/415/440V
電源輸入	Input power	15/25KVA
電極尺寸	Electrode size	300×500mm 300×550mm



ZU-681A

帮角沿边上胶机

Upper Edge Gluing Machine

尺寸	Machine Size	500×600×1100mm
重量	Weight	45KG
電壓	Voltage	220V/50HZ
功率	Power	120W
產量	Capacity	3000Pairs/8H
氣壓	Air pressure	0.3MPS



ZU-681B

中底沿边上胶机

Insole Edge Gluing Machine

尺寸	Machine Size	500×600×1100mm
重量	Weight	45KG
電壓	Voltage	220V/50HZ
功率	Power	120W
產量	Capacity	3000Pairs/8H
氣壓	Air pressure	0.3MPS



ZU-684 前后推台自动熔斷高周波

Hing-Frequency Cutting Machine (Back Forward)

高周出力	H.F Output	8/15KW
最大壓力	Max Pressure	15T/25T
震盪周率	Oscillation Frequency	27.12MHZ
電源電壓	Power Supply	AC 220/380/400/415/440V
電源輸入	Input power	15/25KVA



ZU-685 紫外線照射機

UV Machine

機械尺寸	Machine Size	2400×1020×2080mm
電壓	Voltage	380V 50HZ
輸送速度	Speed	Max 12m/minute
淨重	Net Weight	650KGS
功率	Power	12KW



ZU-686 搖臂裁斷機線
Swing Arm Cutting Machine

型号	Model	YK-687A	YK-687B
裁斷壓力	Cutting Power	22T	27T
工作臺面積	Cutting Table	900 × 430mm	1000 × 500mm
搖臂寬度	Swing Arm Width	370mm	370mm
裁斷行程	Cutting Travel	90mm	90mm
電機功率	Motor Power	1.1KW	1.5KW
機械尺寸	Machine Size	900 × 820 × 1400mm	1000 × 1020 × 1410mm
包裝尺寸	Packing	1000 × 1000 × 1500mm	1100 × 1100 × 1500mm
淨重Net.	Net.Weight	690kgs	950kgs
毛重	G.W	700kgs	960kgs



ZU-687 25T平面油壓裁斷機 (標準型)
Plane Cutting Machine

工作臺尺寸	Working Table	400 × 1250(UP)500 × 1250mm(Down)
裁斷壓力	Cutting Power	25T
裁斷行程	Cutting Travel	50-150mm
電機功率	Motor Power	2.2KW
淨重Net.	Net.Weight	1350kgs
機械尺寸	Machine Size	1550 × 600 × 1600mm



ZU-420 帶刀片皮機
Band Knife Splitting Machine

工作寬度	Working width	420mm
片削厚度	Splitting Thickness	0.2-8mm
帶刀尺寸	Band Knife Size	0.7/50/3500
送料速度	Feeding Speed	6-25m/minute
機械尺寸	Machine Size	1200 × 1400mm
淨重Net.	Net.Weight	635kgs



ZU-301 拔槍機
Hydraulic Delasting Machine

尺寸	Machine Size	L650 × W410 × H1090mm
重量	Weight	120KG
氣壓	Voltage	220V
功率	Power	1HP



ZU-688 精密四柱裁斷線
Precise 4-column Cutting Machine

工作臺尺寸	Working Table	610 × 1600mm
裁斷壓力	Cutting Power	35T
裁斷行程	Cutting Travel	50-180mm
電機功率	Motor Power	2.2KW
淨重Net.	Net.Weight	2000kgs
機械尺寸	Machine Size	2300 × 1050 × 1450mm



ZU-689 移動式液壓裁斷線
Travel Head Cutting Machine

工作臺尺寸	Working Table	1600 × 500mm
裁斷壓力	Cutting Power	30T
壓頭尺寸	Head Size	500 × 500mm
電機功率	Motor Power	2.2KW
淨重Net.	Net.Weight	1900kgs
機械尺寸	Machine Size	2200 × 1200 × 1800mm



ZU-302 畫線機
Sole Marking Machine

尺寸	Machine Size	L50 × W60 × H1550mm
重量	Weight	50KG



ZU-303 拋光機
Polishing Machine

尺寸	Machine Size	L63/W100/H145cm
重量	Weight	135kg
電壓	Voltage	380V
功率	Power	1.9KW
產量	Daily Capacity	1500 Pairs/8H



ZU-304 雙頭打粗機
Double-head Roughing Machine

尺寸	Machine Size	L63/W100/H145cm
重量	Weight	135kg
電壓	Voltage	380V
功率	Power	1.9KW
產量	Daily Capacity	1500 Pairs/8H



ZU-305 刻磨機
Sole Grinding machine (with dust collector)

尺寸	Machine Size	L930/W580/H1260cm
重量	Weight	125kg
電壓	Voltage	380V/50HZ
功率	Power	0.75KW
氣壓	Air pressure	0.5MPS




ZU-306 全自動雞眼機
Automatic Eyeletting Machine

尺寸	Machine Size	550 × 590 × 1430mm
重量	Weight	160/220kg
鸡眼面径	Eyelet flange diameter	6-13mm
鸡眼管径	Eyelet barrel diameter	3-8mm
鸡眼长度	Eyelet Length	3-10mm
喉深	Throat depth	130mm
马力	Power	1/2 HP



ZU-307 半自動雞眼機
Semi-automatic Eyeletting Machine

尺寸	Machine Size	L720/W660/H1430mm
重量	Weight	130kg
鸡眼面径	Eyelet flange diameter	1.5-13mm
鸡眼管径	Eyelet barrel diameter	3-8mm
鸡眼长度	Eyelet Length	3-10mm
喉深	Throat depth	200mm
马力	Power	1/4 HP

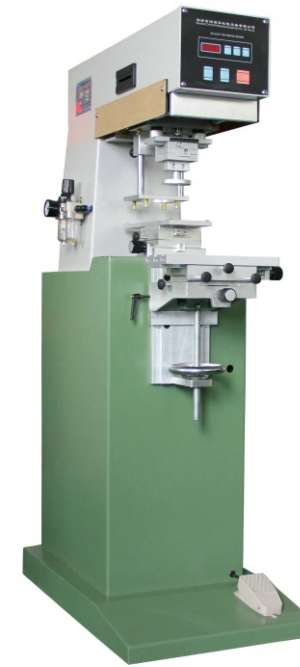

ZU-308 油墨移印機
PAD Rinting


印刷顏色 The printing color	單色 Single colour
油墨直徑 (內外) ink cup diameter(inside and outside)mm	90
適應的刀環尺寸 knife ring size(inside and outside)mm	82*90
鋼板標準尺寸 Max:plate size(mm)	100*250
最大印刷面積 Max:pin size(mm)	70*130
印刷產品高度 printed products are highly(mm)	1*200
前後行程 Before and after the trip	175
印刷速度 Prenting speed/hr	1000-2200
機體尺寸 Machine Size LxWxHx(mm)	450*680*1380
用氣壓力 Air pressure	3-6
電源 Power	110/220v 50/60Hz



ZU-309 削皮機
Skiving Machine



ZU-310 單頭打粗機
Single-head Roughing Machine

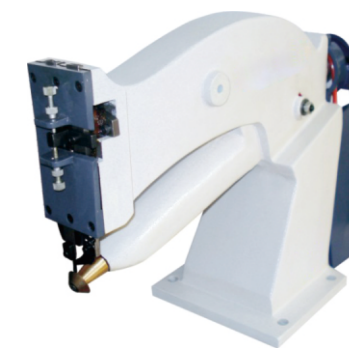

ZU-311 修內裏機
Trimming Machine



ZU-101 分条机
Strap Cutting Machine(30" 42" 50")

本机适用于对PU、PVC、真皮等面积较大材料进行分条使用，随机配有不同规格的附件，可根据需要对分条宽度和裁切的速度进行调节，操作简单。

The Machine can do the strap cutting on large size PU, PVC, genuine leather and so on. It is easy to do the adjustment on the cutting strap width and cutting speed.

电 压	Voltage	380V 50HZ
功 率	Power	1HP
工作范围	Working Area	30" 40" 50"
机械尺寸	Machine Size	1200 × 720 × 1200mm
净重/毛重	Weight	200/250KGS




ZU-102 分条机
Strap Cutting Machine(14" 20" 28")

本机适用于对PU、PVC、真皮等材料进行分条使用，随机配有不同规格的附件，可根据需要对分条宽度和裁切的速度进行调节，操作简单。

The Machine can do the strap cutting on PU, PVC, genuine leather and so on. It is easy to do the adjustment on the cutting strap width and cutting speed.

电 压	Voltage	220V 50HZ
功 率	Power	1/2HP
工作范围	Working Area	14"
机械尺寸	Machine Size	1200 × 520 × 1120mm
净重/毛重	Weight	120/170KGS

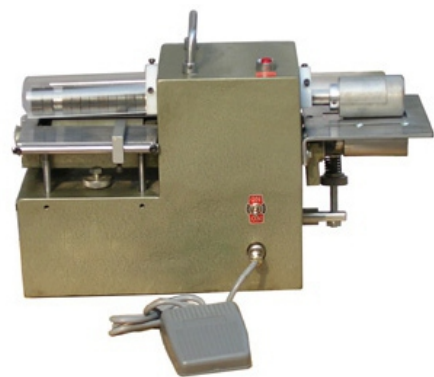


ZU-103 迷你型分条、抽条机
Mini Strap Cutting and Piping Machine

本机小巧，方便携带，适用于PU、PVC真皮等材料的分条机抽条作业使用。

The machine is small and portable, it is suitable for the strap cutting on PU, PVC, genuine leather, at the same time with jigs it can also do the piping work.

电 压	Voltage	220V 50HZ
功 率	Power	1/8HP
机械尺寸	Machine Size	450 × 180 × 320mm
净重/毛重	Weight	22/35KGS

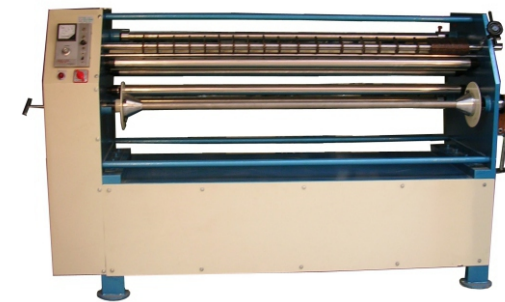


ZU-104 多刀分条机
Multiple-knife Strap Cutting Machine

本机适用于对较薄的塑料胶布、PVC等整卷材料的多刀分条使用，一次可将整卷材料分切完毕并复卷完毕。

The machine can do the multiple strap cutting on thin plastic tapes, rolls of PVC and other material in rolls. It can finish the cutting work on the one roll of material in one time.

电 压	Voltage	380V 50HZ
功 率	Power	2HP
机械尺寸	Machine Size	2450 × 850 × 1450mm
净重/毛重	Weight	600/700KGS

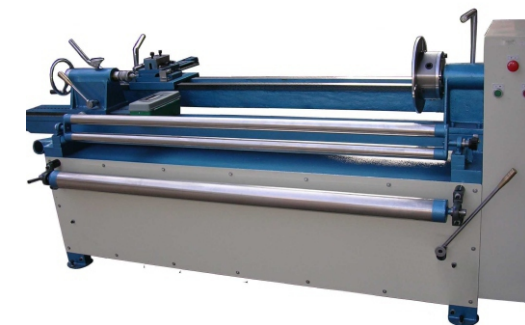

ZU-105 单刀分条机
Single Knife Strap Cutting Machine

本机适用于对大卷的PU、PVC、布料等材料进行分条使用。随机配有复卷装置可将裁切后的材料完美复卷。同时可根据裁切的材料不同配置无极变速或四段变速，进刀板加长，尾座可调，操作简单，分条尺寸准确。

The machine can do the strap cutting on large rolls of PU, PVC and fabric.

the machine also equipped with the re-rolling device which can do the rolling work after cutting.

According to the different material, the machine working speed is also adjustable, easy to operate, cutting size is very accurate.

电 压	Voltage	380V 50HZ
功 率	Power	1HP
机械尺寸	Machine Size	2580 × 1450 × 1520mm
净重/毛重	Weight	650/780KGS



ZU-106 圆裁分条机
Continuous Circular Strap Cutting Machine

本机适用于对真皮、PU、PVC等材料进行无限长分条使用。分条的分条的速度可以根据材料不同和操作需要进行调节。软硬皮料皆可，精度高，可分2-15mm宽度皮条。

The machine can do the continuous strap cutting on soft or hard PU, PVC, genuine leather from size 2mm to 15mm.

The cutting speed can be adjusted easily according the different material.

电 压	Voltage	220V 50HZ
功 率	Power	0.75KW
机械尺寸	Machine Size	1400 × 1200 × 1250mm
净重/毛重	Weight	120/200KGS



ZU-107 削皮机 (带吸尘)
Skiving Machine (With Dust Collector)

本机适用于对各种PU、PVC和真皮材料等边缘削薄加工使用，配有吸尘装置，整机美观大方，性能稳定，操作简单。

The machine is suitable to do the skiving work on the edge of PU, PVC, and genuine leather. Equipped with the duct collector, the machine looks nice, easy to operate.

电 压	Voltage	220V 50HZ
功 率	Power	0.55KW
机械尺寸	Machine Size	1210 × 550 × 1150mm
净重/毛重	Weight	120/155KGS



ZU-108 黄胶上胶机
Gluing Machine For Solvent Based Glue

本机适用于PU黄胶、强力胶等非速干型胶水上胶使用。本机采用新型的独立装胶装置，可以定期对机器进行清洗保养，提高机器使用效果和机械寿命。根据上胶材料的不同本机可配置不同的上胶轮，从而达到不同上胶厚度和上胶量的需要。本机操作简单，可以根据需要调节上胶的速度。同时，本机下轮采用高品质硅胶轮，可对凹凸不平的材料也能达到极佳的上胶效果。

The machine is suitable to work on solvent glue, PU glue and other non-fast dry glues; With the new separate glue bottom, can easily do the cleaning on the machine, to keep the machine, salways in good condition and increase the life span of the machine; According to the different material, glue applying volume, and the glue applying thickness, then can fix the machine with different depth glue rollers; The working speed is adjustable, the bottom roller is made of silicon rubber, very soft, so the machine can also do the perfect work of applying glue on uneven surface material.

工作尺寸 Working Width:
20mm/35mm/75mm/100mm/150mm/200mm/300mm
特殊订做尺寸 Customerized Size:3mm/6mm/9mm/400mm



ZU-109 水性胶上胶机
Gluing Machine for Latex Glue

本机设计精密，可适用于水性白胶，一滴不漏。本机机头可以360°旋转，不怕胶干、胶漏；本机采用新型的独立装胶装置，可以定期对机器进行清洗保养，提高机器使用效果和机械寿命。The machine is very precise, can work on the latex glue with no leakage; The gluing machine head is 360° adjustable, after using can turn the glue bottle to bottle, then the glue in the glue tank flow back to bottle, glue will not be dry and no leakage. With the separate glue bottom, can easily do the cleaning on the machine, to keep the working status of the machine, and increase the life span of the machine;

工作尺寸 Working Width:
20mm/35mm/75mm/100mm/150mm/200mm/300mm
特殊订做尺寸 Customerized Size:3mm/6mm/9mm/400mm



ZU-110 树脂上糊机
Latex Glue Pasting Machine

本机采用底部上胶的方式对PU、PVC、真皮、纸张、里布等材料上糊使用。本机操作简单，可根据材料和操作的需要调节上糊速度和上胶的厚度。The machine can easily apply the latex glue to the back side of PU, PVC, genuine leather, paper, lining and so on. It is easy to operate and adjust the working speed and glue applying thickness.

电 压	Voltage	220V 50HZ
功 率	Power	0.55KW
工作范围	Working Area	12"、17"、22"、27"



ZU-111 数控喷胶机
Digital Glue Spray Machine

本机与传统刷胶相比，可以节省2—4人，极大提高工作效率，节约成本；本机采用进口气动喷枪，喷枪控制精细，喷枪高度及喷射宽度可调节，喷胶均匀，与传统刷胶相比可以节省胶水40%—60%，降低生产成本比；本机操作简单，配有手动、脚踏和自动控制系统，用户可根据材料直接在触摸屏上进行任意图形设定，同时系统可储存图片多达999个；本机配置抽风系统，可将喷胶时产生的胶水气味和雾气进行过滤处理，设备待机时，喷胶装置全封闭，防止胶水挥发和堵塞喷头；

The machine can save 2- 4 workers, save 40%-60% glue consumption when compare with traditional gluing operation, greatly improve the efficiency, save the production cost; The machine is equipped with memory system can keep maximum 999 designs, easy to operate; With the exhaust system, can easily suck away the smell and glue spray dusts; With the fully close glue tank, the glue will not become dry and stuck the spray gun head.

工作范围 Working Area: 800×500mm



ZU-112 喷胶台
Latex Glue Spray Booth

喷枪采用真空原理控制胶水喷涂作业，从而达到喷枪永不漏胶和堵塞现象，喷枪终身保修；抽风系统采用原有外界气压，经过特殊装置在喷胶台面产生吸力，不会因马达抽风伴有胶水附着在马达叶片而缩短马达寿命。

The spray gun adopts principle of vacuum to control glue spray, and it helps to stop leakage and blocking forever. And the gun enjoys lifetime warranty. Ventilation system adopts the ambient pressure and it generate a suction on spray tale by a special device, then no glue can adhere to motor blades at ventilation, so as to prevent it from shorten motor lifetime.



ZU-113 热熔胶沿边上胶机
Hot Melt Edge Gluing Machine

本机取代传统的双面刷胶和双面胶，仅需单面上胶，提高工作效率。

本机操作简单，可根据上胶材料的不同和操作需要任意调节上胶速度，同时根据不同上胶范围的需要配置不同的上胶轮。

The machine is to work on hot melt glue which only need to apply on one side of the attaching component, but the attachment is very strong, greatly improve the efficiency. For different size gluing width, need to fix the different width roller, and also the gluing speed and glue applying volume is adjustable.



ZU-114 拉链四面上胶机
Hot melt Gluing Machine for Zipper (Double Side)

本机专门针对拉链上胶使用，一次可以完成对拉链四面(上、下、左、右)上胶，提高工作效率。

本机根据拉链不同需要配置不同的模具，同时根据具体上胶要求的需要特殊订制上胶轮，达到完美上胶效果。

The machine can apply the hot melt glue on the double side of the zipper (top & bottom, Left & right) in one time, very efficient;

For size 3, 5, 8, zipper fix the machine with different size moulds and accessories, and for better performance, moulds should be exactly made according the size of the customer zippers.



ZU-115A 手推式热熔胶刷胶机
Gun Type Hot Melt Gluing Machine



ZU-115B 手握式热熔胶机
Handhold Hot Melt Gluing Machine



ZU-116A



ZU-116B

ZU-116 单边油边机
Single Edge Inking Machine

本机适用于对规则或者不规则材料的边缘油边使用；

本机配置调速装置，任意调节油边速度；

The machine is suitable to apply ink on the edge of regular and irregular material, with speed adjuster, can easily adjust the working speed.



ZU-116C



ZU-117 半自动油边机
Semi-auto Single Edge Inking Machine

本机配置送料装置，可实现部分规则材料的半自动油边使用。

With auto feeding device, can do the semi-auto edge inking work on most of the regular material.



ZU-118 电动油边盒
Electric Inking Box



ZU-119 双边油边机
Double Edges Inking Machine

本机适用于对皮带、肩带、表带等两边油边使用；
本机配置调速装置，同时根据材料的宽度（3mm-70mm）和油边的厚薄的需要可以轻松设置。

The Machine can apply the ink on the both sides of the belt, handbag straps, and watch straps;
With adjustment device, can easily adjust the speed and ink applying thickness according to the material and its width 3mm-70mm.




ZU-121A 单边磨边机
Single Wheel Buffing Machine

本机适用于不规则物件的磨边作业使用，可以根据需要更换不同的磨轮，并且可以根据需要调节磨轮的速度。本机配备吸尘装置，作业更卫生、更环保。

The machine can do the buffing work on irregular items, and as per different purpose can fix the machine with buffing wheel, polishing wheel;
With speed adjuster, easy to control the speed;



ZU-121B 单边磨边机
Single Wheel Buffing Machine

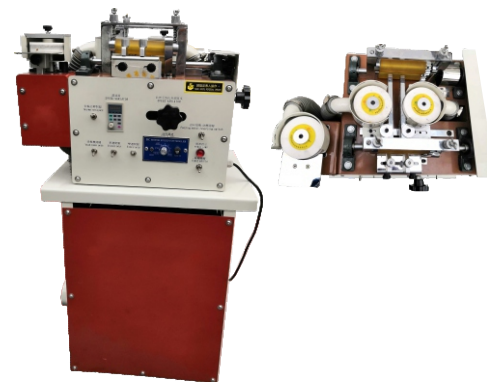

ZU-122 双边磨边机
Double Edges Buffing Machine



ZU-123 立式双边磨边机
Vertical Buffing Machine



ZU-124 四轮磨边机
4 Wheels Buffing & Polishing Machine

本机适用于皮带、肩带、背带等两边的磨边、抛光、打蜡。
本机采用四轮两段式结构，前两个轮子用来磨边，后两个轮子用来抛光使用。

本机配置吸尘装置，变频调节系统，工作更加环保，更加稳定，同时可根据需要轻松调节工作速度，提高磨边、抛光效果。

The machine is suitable for grinding, polishing, and waxing the double edges of the belt, handbag straps;
The front 2 wheels are for buffing and the backside 2 wheels are for polishing;


With the speed adjuster, easy to operate and with dust collector, make the environment clean and neat.



ZU-125A 气压皮带压花机 (滚轮式) **ZU-125B 油压皮带压花机 (滚轮式)**
Pneumatic Belt Embossing Machine --Roller Heated Hydraulic Belt Embossing Machine --Roller Heated

本机适用于长条形真皮、PU皮带、肩带的连续烙印加工使用。配合不同的模具，并根据材料调节不同的温度和工作速度，达到理想的烙印效果。

The machine can do the continuous embossing work on the genuine leather belt, PU belt, and handbag straps;
With different moulds, and the adjustment of the speed and temperature can reach the perfect performance.

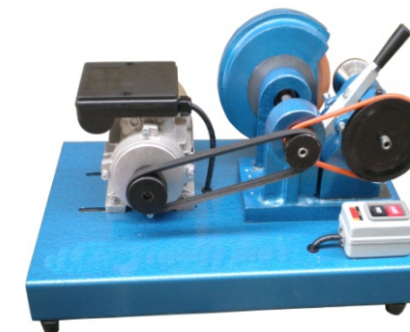

ZU-126 圆刀磨刀机
Knife Sharpening Machine

本机适用于分条机圆刀的磨刀使用。

The machine is suitable for sharpening the round bell knife.



ZU-127 油压皮带压花机
Hydraulic Belt Embossing Machine

本机适用于对皮带、肩带的压花加工使用，压力稳定，并配有恒温加热装置，是皮带表面光滑紧密，配合不同的模具压出不同的花纹和图案。

The machine is to do the embossing work on the belt, handbag straps;
With stable pressure, heating system, the performed belt surface is smooth, tight and embossed design is clear and nice.

电 压	Voltage	380V 50HZ
功 率	Power	2.2KW
工作范围	Working Area	1500x 110mm
工作压力	Pressure	120 T
机械尺寸	Machine Size	1700 × 1300 × 1700mm
净重/毛重	Weight	1500/ 1580KGS



ZU-130 油压压光机
Hydraulic Ironing Machine

本机上滚轮进行加热，下滚轮为软橡胶，皮料压过后表面更加光滑、平整有光泽。

The top roller is with heated, the bottom roller is wrapped with soft rubber, after the leather going through the rollers, the surface is smooth and shinning.


工作范围 Working Area: 600mm、1000mm



ZU-131 皮带压软机
Belt Softening Machine

本机主要是对硬质皮带进行压软或者打软处理，替代人工打软或者拉软，提高工作效率。

The machine is to soften the hard leather belt, to improve the efficiency and performance.

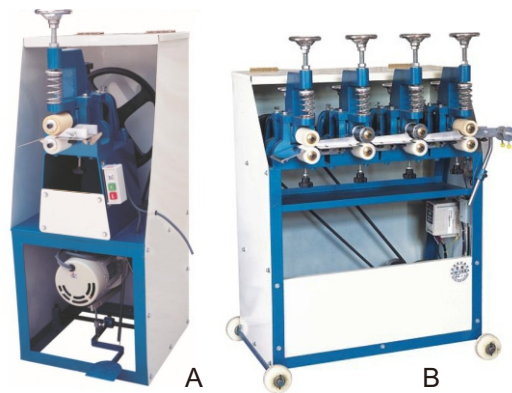

ZU-128 一段轮贴合机 / 四段轮贴合机
Coupling Machine(Single Wheel/4 Wheels)

本机适用于男女皮带、肩带上胶对贴后贴合成型加工使用。

The machine is to do the coupling and forming work after the gluing work on the belt and handbag straps.



ZU-129 皮带修边机
Belt Trimming Machine

本机适用于男女皮带、宠物皮带、肩带、夹带等两边的同时修整；

本机随机附送不同的刀具，必要时根据不同的需求进行更换；

本机配置变频调节器，可以轻松调节修边速度，达到更好的修边效果。

The machine is to do the trimming work on the edges of belt, handbag straps, pet belt;
With different knives of different round blades, can trim the belt into different round edges;
With speed adjuster, easy to control the speed according to different material, to reach the best performance.



ZU-132 皮带打蜡机
Waxing Machine

本机适用于皮革抛光、擦色等表面处理，使处理后的皮革表面光泽更加均匀更加光亮。


The machine is used for polishing and waxing the surface of leather to make the leather shinning and nice.



ZU-133 自动打孔机
Automatic Punching Machine

本机适用于对长条形的男女皮带、皮条等进行连续冲孔使用。冲孔的数量及孔与孔之间的距离可以自行设定 (0-50mm)。

The machine is to punch the continuous holes in belt and straps;
The number of holes and distance between the two holes are easily set from 0 to 50mm.

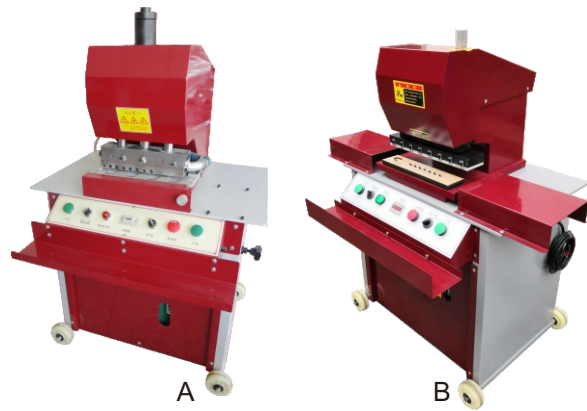

ZU-134 钉寸冲孔机

Hydraulic Punching Machine (Single Head)

本机适用于男女皮带的尾端及肩带的冲孔，油压配置，压力更稳定，更强劲。

The machine is to punching the holes and cutting the round end in the belt and handbag straps, with hydraulic system, more stable and powerful.



ZU-135 双头钉寸冲孔机

Hydraulic Punching Machine (Double Heads)

本机采用油压控制，可一次完成男女皮带头部、尾端的裁切机皮带冲孔作业。

本机配置自动调节装置，可以根据需要调节孔位与尾端的距离；

The machine can finish the cutting of belt front end, back end, and punching the holes in one punch. With automatic adjustment system, can easily set the distance of holes between the back end.



ZU-136 皮带染孔机

Hole Dyeing Machine

本机适用于各种男女皮带、肩带的为孔染色使用。随机附送不同规格的染孔针，可以根据需要进行更换。

本机染孔均匀，染孔速度快，可以提高染孔效率和染孔效果。

The machine is for dyeing or colouring the holes in the belt and handbag straps;

With the change of different size needles can easily do the dyeing work with high efficiency and good final performance.



ZU-137A 钉环套机

Manual Belt Looping Machine



ZU-137B 气动钉环套机

Pneumatic Belt Looping Machine



ZU-138 皮革整烫机、烫平机

Fusing & Ironing Machine

本机采用滚筒皮带式结构，通过整烫消除皮革表面的皱纹，使皮面更加靓丽。

本机滚轮的温度和速度可以根据材料的不同需要进行调节，从而达到最佳的效果；

本机也可用作各种预温贴合、里布及织带整烫使用。

With the roller & belt design, can easily remove the wrinkles in the surface of leather; The temperature of the roller and roller running speed can easily be set according to different material; The machine can also be used for the fusing the lining with leather, and ironing the fabric lining and leather.

工作尺寸 Working Width:

500mm/700mm/1000mm/1500mm



ZU-139 包骨机

Piping Machine

本机将皮条上胶、包绳芯、贴合与切齿等工序一次性完成，提高工作效率提升包骨品质。

The machine can finish the work of gluing, binding, piping, and teeth cutting together, greatly improve the efficiency and final quality.



ZU-140 压线机
Creasing Machine

本机适用于皮件直线烙印，小面积皮件烙印使用。

本机配置气动及脚踏开关，操作简单。

The machine is used for do the creasing on the leather, with pneumatic foot switch, very easy to operate.



ZU-143 油压烫金机
Hydraulic Hot Stamping Machine

本机适用于较大皮面的烙印或者烫金使用。油压控制压力及行程，自由调节温度和压着时间，同时配有安全作业开关，操作有保障。

The machine is to work on the large size material for the embossing and hot stamping;
With hydraulic system, stable pressure, and powerful;
It is easy to set the temperature and pressing time, and with safety device, easy to operate.

工作压力 Working Pressure: 3 Tons
工作范围 Working Area: 200×300mm



ZU-141 气压式烙印机
Pneumatic Embossing Machine

本机适用于对皮革或者PU表面进行烙印使用。

本机操作简单，可根据不同的材料可以对温度和压力进行调节。

The machine is to do the embossing work on leather and PU.

It is easy to operate the machine, the temperature and working pressure can be easily set according to different material.

工作范围 Working Area: 200×150mm




ZU-145 四柱油压烫金机
Four-column Hydraulic Hot Stamping Machine

本机适用于较大皮面的烙印或者烫金使用。油压控制压力及行程，自由调节温度和压着时间，同时配有安全作业开关，操作有保障。

本机可以根据客人要求订制。

The machine is to work on the large size material for the embossing and hot stamping;
With hydraulic system, stable pressure, and powerful;
The machine working pressure and working area can be customized.

工作压力 Working Pressure: 5-8 Tons
工作范围 Working Area: 300×400mm

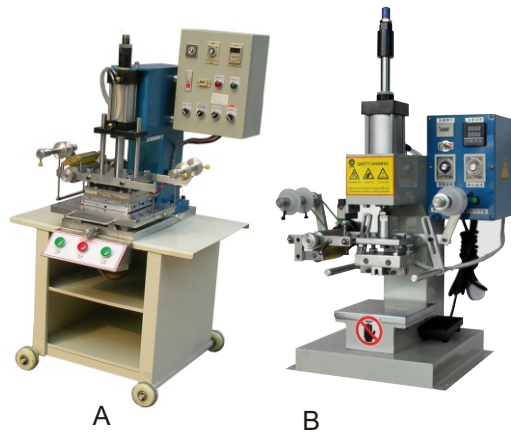

ZU-142 气压式烫金机
Pneumatic Hot Stamping Machine

本机适用于对皮革或者PU表面进行烙印或者烫金使用。

本机操作简单，可根据不同的材料可以对温度和压力进行调节。

The machine is to do the embossing work on leather and PU.

It is easy to operate the machine, the temperature and working pressure can be easily set according to different material.

工作范围 Working Area: 200×150mm



ZU-146 手动烙印机
Manual Type Embossing Machine



ZU-147 切齿机
VVV Edge Cutting Machine



ZU-148 手挽定型机

Handle Forming Machine

本机根据手挽带的不同尺寸制作模具，用于对包包的手挽带进行定型使用；

To work with the moulds made according to the handle samples, the machine can easily form the perfect shape of the handle, more efficient and same quality standard.




ZU-150 手挽锁线机

Handle Lock Stitching Machine

本机适用于手袋的手腕带的两头锁头使用，替代传统的手工锁头，极大的提高工作效率。

The machine is to do the handle lock stitching work, greatly improve efficiency.

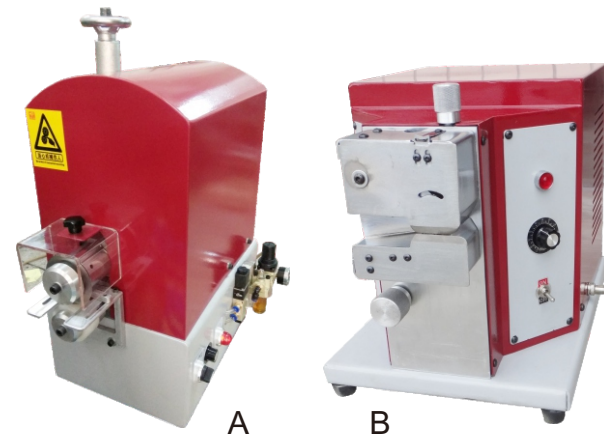

ZU-149 手挽袋修边机

Handle Trimming Machine

本机用于修整手袋的手挽带，使尺寸标准、光滑。本机操作简单，极大提高工作效率。

The machine is to trim the formed and stitched handles to make the handle standard and smooth.



ZU-151 自动上胶压平机

Auto Gluing and Seam Hammering Machine

本机适用于鞋帮、箱包、手机套等各种皮质品 PVC、PU、天然皮、人造皮、布料材质的接缝进行上胶,加补强带,锤平多工序一体化作业。

The machine is to do the gluing and hammering work on the seam together.



ZU-152 自动上胶折边机

Automatic Edge Gluing and Folding Machine

本机适用于鞋类、皮包、钱包、手机套皮制品的PVC、PU、天然皮、人造皮、布料等材质,使用热熔胶自动上胶折边作业。

本机折边宽度为3-8mm,并可将加强带一并折入；

本机具有自定切齿功能,拐弯折边时自动慢速。

The machine is combine the applying hot melt glue and edge folding work together;

The edge folding width is 3mm to 8mm adjustable, and it can also do the work of attaching the reinforce tapes;

The machine also with the function of teeth cutting and slowing down on the inner turning area.



ZU-153 全自动银包折边机

Automatic Lady Purse Edge Gluing and Folding Machine

本机采用先进的翻折机构,调节轻易简便,折边细致平整,圆角角度均匀,效果美观；

本机操作简单,可对溶胶温度、出胶量、等进行任意调节。本机折边宽度可调整为3mm-10mm,工作效率为手工操作的5-10倍

The machine apply advanced reverse folding device, can easily do the necessary adjustment;

The edge folding is smooth, round angles are even and nice;

It is easy to set the glue melt temperature, glue supply volume, and working speed.

The machine folding width is adjustable from 3mm to 10mm, and it is 5 to 10 times faster than folding manually.



ZU-154 全自动银包上胶围拉链机

Automatic Lady Purse Zipper Gluing and Attaching Machine

本机将自动送料、自动上胶、自动包拉链等功能融于一体；本机操作简单,可对溶胶温度、出胶量、等进行任意调节。本机配合模具达到极佳的工作效果,极大提高工作效率。

The machine combine the zipper feeding, gluing and attaching machine together, greatly improve the efficiency;

It is easy to set the glue melt temperature, glue supply volume, and working speed.



ZU-155A 窗口折边机

Zipper Gap Folding Machine

本机广泛应用于手袋、背包、银包、服装等窗口折边；

本机配置模块组合式模具，5-12寸长度窗口任意组合调节，单套模具即可解决所有不同长度窗口折边的需要；

本机操作简单，效率高，每分钟可折10-15个，并且折边效果规范统一；

本机根据不同形状的窗口订制模具，也适合折直角窗口、圆角窗口、镜面窗口以及其他异形窗口。

The machine is widely used for the zipper gap folding on handbags, lady purse and garment industry; With two sets of combining version moulds, the machine can work on the zipper gap size from 5 inches to 12 inches long, no extra moulds are needed for the machine;

The machine can fold around 10 to 15 pcs in one minute, more efficient, and same high folding quality; With extra moulds according to samples, the machine can also do the inner folding work on regular shape and irregular shape.



ZU-155B 窗口折边机

Zipper Gap Gluing & Folding Machine



ZU-157A 电脑切带机

Tape Cutting Machine



ZU-157B 微电脑切带机

Tape Cutting Machine




ZU-158 银包修正机

Edge Trimming Machine



ZU-159 锤骨机

Hammering Machine

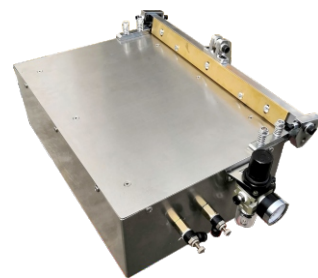

ZU-156A 气动折边机

Pneumatic Edge Folding Machine

工作尺寸 Working Width:
12"、16"、20"、24"



ZU-156B 手动折边机

Manual Edge Folding Machine

工作尺寸 Working Width:
12"、14"



ZU-156C 手动折边机

Footpedal Edge Folding Machine

工作尺寸 Working Width:
12"、14"、16"、20"



ZU-160 半自动鸡眼机

Semi-automatic Eyeletting Machine



ZU-161 全自动鸡眼机

Automatic Eyeletting Machine



ZU-162 拉链上至机
Zipper Top Stop Fixing Machine



ZU-162 拉链下至机
Zipper Bottom Stop Fixing Machine



ZU-163 单门烤箱
Cabinet Drier



ZU-164 红外线烤箱
NIR Drying Machine



ZU-165 自动旋转红外线烤箱
Rotary Drier



ZU-166 立体循环烘干流水线
Vertical & Rotary Conveyor For Finished Bags